




# RAJA SEALS®

## RS SD TYPE TYPICAL INSTALLTION AND DIMENSION

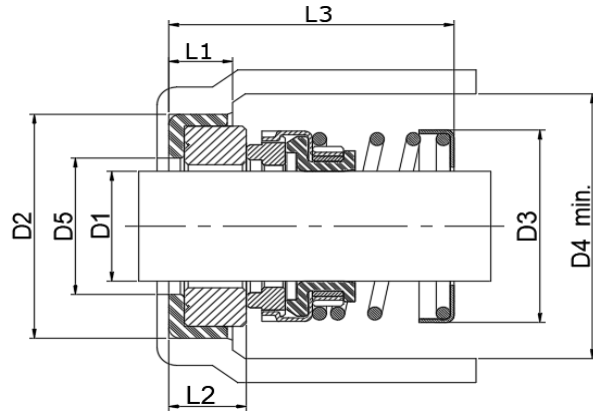

| PART CODE  | D1   | D2<br>± 0.05 | D3<br>± 0.50 | D4<br>Min. | D5    | L1    | L2    | L3    |
|------------|------|--------------|--------------|------------|-------|-------|-------|-------|
| RS16 SD    | 16   | 31.50        | 27.00        | 30.00      | 18.00 | 9.50  | 10.00 | 30.00 |
| RS19 SD    | 19   | 34.50        | 31.50        | 34.50      | 21.00 | 9.25  | 9.50  | 30.00 |
| RS25 SD    | 25   | 45.70        | 42.50        | 45.50      | 27.50 | 17.00 | 18.00 | 43.00 |
| RS25 SD-01 | 25   | 42.00        | 42.50        | 45.50      | 27.50 | 8.00  | 8.50  | 29.00 |
| RS25.4 SD  | 25.4 | 41.50        | 42.50        | 45.50      | 27.50 | 10.00 | 11.00 | 36.00 |

- ❖ ALL DIMENSIONS ARE IN MM
- ❖ APPLY ONLY SOAP WATER ON ELASTOMER PARTS DURING INSTALLATION

[www.rajaseals.com](http://www.rajaseals.com)



**94875 47913**

REV : 0

DATE : 15-04-25