




RAJA SEALS

RC TYPE TYPICAL INSTALLATION AND DIMENSION

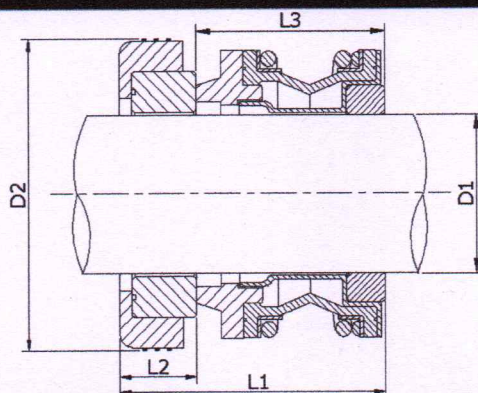

RC TYPE DIMENSIONAL CHART

Item	$\phi D1 + 0.02$	$L1 \pm 0.70$	$\phi D2 + 0.20$	$L2 \pm 0.20$	$L3 \pm 0.50$	Housing Bore ± 0.05
RC 12/RC12(W)	12	22.00	25.70	6.00	16.00	25.40
RC 12 (S)-02	12	26.80	25.80	7.80	19.00	25.40
RC 14	14	33.00	32.00	10.00	23.00	31.60
RC 16 (B)	16	29.50	30.00	7.50	22.00	29.60
RC 16	16	32.50	32.00	10.00	22.50	31.60
RC 18	18	33.00	37.00	9.50	23.50	36.50
RC 18 (B)	18	33.50	37.00	9.50	24.00	36.50
RC 19 (S)	19	33.00	35.00	9.50	23.50	34.50
RC 19 (T)	19	33.00	37.00	9.50	23.50	36.50
RC 19 K	19	33.50	36.50	10.00	23.50	36.00
RC 22	22	35.00	41.50	8.50	26.50	41.00
RC 25 (S)	25	35.00	41.50	8.50	26.50	41.00
RC 25 (T)	25	35.00	42.00	8.50	26.50	41.50
RC 25-01	25	35.00	42.40	8.50	26.50	42.00
RC 28	28	40.00	48.00	10.50	29.50	47.50
RC 30	30	40.00	52.00	10.50	29.50	51.50
RC 32	32	40.00	52.00	10.50	29.50	51.50

- ❖ APPLY ONLY SOAP WATER ON ELASTOMER PARTS DURING INSTALLATION
- ❖ ALL DIMENSIONS ARE IN MM



0422-2562275/2563190

www.rajasealsindia.com



REV : 08

DATE : 16-10-21

PAGE: 3 / 9